



CI-006



CI-007



CI-008

LED lighting

spot series



- CI-006 3,600
- LED-COB-30W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：2500lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L120×H300×W160



- CI-007 2,400
- LED-COB-20W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L120×H220×W90



- CI-008 2,400
- LED-COB-20W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L120×H220×W90



CI-009



CI-010



CI-012




CI-011





■ CI-009 1,500
■ LED-COB-15W 軌道燈

- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1300lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L140×H240×W40




■ CI-011 800
■ LED-AR111-10W 軌道燈

- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：700lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L140×H240×W40




■ CI-010 1,500
■ LED-COB-15W 軌道燈


- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1300lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L140×H240×W40




■ CI-012 800
■ LED-AR111-10W 軌道燈

- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：700lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L140×H240×W40





■ CI-013



■ CI-014



■ CI-015

LED lighting

spot series



- CI-013 2,800
- LED-COB-20W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L160×H190×W140



- CI-014 1,400
- LED-COB-10W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L140×H220×W100



- CI-015 1,800
- LED-COB-20W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L170×H240×W125



CI-016



CI-017




CI-018




CI-019

新產品


- CI-016 950
- LED-COB-10W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L90×H210×W80




- CI-018 600
- LED-12W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：700lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L75×H180×W45



- CI-017 1,000
- LED-COB-10W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L70×H160×W90



- CI-019 600
- LED-10W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：700lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L75×H180×W45





■ CI-020



■ CI-022




■ CI-021

LED lighting


spot series



- CI-020 1,800
- LED-COB-20W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L120×H220×W70



- CI-021 900
- LED-COB-10W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L90×H170×W60



- CI-022 900
- LED-COB-10W 軌道燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：L90×H170×W60

- CI-023 500
- SL-209-AC7W
- 軌道燈全套
- LED : OSRAM Inside

- CI-024 500
- SL-209-AC7W
- 軌道燈全套
- LED : OSRAM Inside

- CI-025 700
- SL-209-AC7W
- 軌道燈全套
- LED : OSRAM Inside

- CI-026 1,600
- LED-PAR30 15W 軌道燈
- 輸入電壓 : AC90-240V
- LED : CREE Inside
- 輸出流明 : 1300lm
- 工作壽命 : 30000 小時
- 尺寸 (mm) : L120×H260×W170

- CI-027 1,600
- LED-PAR30 15W 軌道燈
- 輸入電壓 : AC90-240V
- LED : CREE Inside
- 輸出流明 : 1300lm
- 工作壽命 : 30000 小時
- 尺寸 (mm) : L110×H260×W160

- CI-028 1,500
- SL-866
- 軌道燈筒型全套
- LED : CREE Inside

- CI-029 1,500
- SL-866
- 軌道燈筒型全套
- LED : CREE Inside


- CI-030 1,500
- SL-865
- 軌道燈半圓形型全套
- LED : CREE Inside

- CI-031 1,500
- SL-865
- 軌道燈半圓形型全套

新產品




■ CI-023



新產品




■ CI-024



新產品




■ CI-025



■ CI-026



■ CI-028




■ CI-030



■ CI-027



■ CI-029



■ CI-031





■ CI-033



■ CI-032




■ CI-034




■ CI-035

LED lighting

spot series



- CI-032 1,800
- LED-COB-20W 戶外燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：D50×H210×W180



- CI-033 1,400
- LED-COB-10W 戶外燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：D40×H170×W50



- CI-034 1,800
- LED-COB-20W 戶外燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：D100×H150×W180



- CI-035 1,400
- LED-COB-10W 戶外燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：D140×H110×W90



嵌入孔 150mm
 CI-036
 SL-819
 嵌入孔 120mm
 CI-037
 SL-818







新產品
 嵌入孔 150mm
 CI-039
 SL-825



新產品
 嵌入孔 150mm
 CI-038
 SL-820



新產品
 嵌入孔 150mm
 CI-040
 SL-820-1



- CI-036 600
- LED-12W 崁燈
- 輸入電壓：AC110、220V
- LED：OSRAM Inside
- 輸出流明：1000lm
- 工作壽命：30000小時
- 尺寸(mm)：Φ170×H50

- CI-037 600
- LED-12W 崁燈
- 輸入電壓：AC110、220V
- LED：OSRAM Inside
- 輸出流明：1000lm
- 工作壽命：30000小時
- 尺寸(mm)：Φ140×H50

- CI-038 1,100
- LED-18W 崁燈
- 輸入電壓：AC90-240V
- LED：OSRAM Inside
- 輸出流明：1500lm
- 工作壽命：30000小時
- 尺寸(mm)：Φ180×H50

- CI-039 380
- LED-12W 崁燈
- 輸入電壓：AC110、220V
- LED：台光牌 LED Inside
- 輸出流明：1000lm
- 工作壽命：30000小時
- 尺寸(mm)：Φ240×H85

- CI-040 1,100
- LED-18W 崁燈
- 輸入電壓：AC110、220V
- LED：OSRAM Inside
- 輸出流明：1500lm
- 工作壽命：30000小時
- 尺寸(mm)：Φ180×H50



嵌入孔
95mm

■ CI-041
■ SL-807



嵌入孔
90mm

■ CI-043
■ SL-807



嵌入孔
70mm

■ CI-045



嵌入孔
95mm

■ CI-042
■ SL-807





嵌入孔
95mm

■ CI-044
■ SL-807



嵌入孔
70mm

■ CI-046



- CI-041 900
- LED-COB-10W 嵌燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ110×H60

- CI-042 500
- LED-10W 嵌燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：700lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ110×H60

- CI-043 900
- LED-COB-10W 嵌燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ100×H67

- CI-044 500
- LED-10W 嵌燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：700lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ100×H55

- CI-045 1,000
- LED-COB-5W 嵌燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：400lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ100×H67

- CI-046 1,100
- LED-COB-10W 嵌燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ100×H55



新產品

嵌入孔
95mm

CI-047



新產品

嵌入孔
72mm

CI-049



嵌入孔
60mm

CI-051



嵌入孔
95mm

CI-048



新產品


嵌入孔
72mm

CI-050




嵌入孔
60mm


CI-052




- CI-047 400
- LED 7W 燈泡+燈具+台光牌變壓器
- 消耗功率 :7W
- LED: OSRAM Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :300lm
- 顏色 :W/WW/R/G/B/A
- 演色性 CRI:84
- 出光角度 :30
- 工作壽命 :30,000 小時
- 尺寸 (mm) : Φ95×H105




- CI-048 600
- LED 6W 燈泡+燈具+台光牌變壓器
- 消耗功率 :6W
- LED:Prolight Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :400lm
- 顏色 :W/WW/R/G/B/A
- 演色性 CRI:84
- 出光角度 :30
- 工作壽命 :30,000 小時
- 尺寸 (mm) : Φ95×H105




- CI-049 500
- LED 模組+燈具+台光牌變壓器
- 消耗功率 :7W
- LED: OSRAM Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :400lm
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :30
- 工作壽命 :30,000 小時
- 尺寸 (mm) : Φ69×H20



- CI-050 400
- LED 6W 燈泡+燈具+台光牌變壓器
- 消耗功率 :7W
- LED: OSRAM Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :400lm
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :30
- 工作壽命 :30,000 小時
- 尺寸 (mm) : Φ69×H20



- CI-051 380
- LED 模組+燈具+台光牌變壓器
- 消耗功率 :5W
- LED: CREE Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :300lm
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :30
- 工作壽命 :30,000 小時
- 尺寸 (mm) : Φ69×H20



- CI-052 380
- LED 6W 燈泡+燈具+台光牌變壓器
- 消耗功率 :5W
- LED: CREE Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :300lm
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :30
- 工作壽命 :30,000 小時
- 尺寸 (mm) : Φ69×H20



嵌入孔
120mm

CI-053



嵌入孔
90mm

CI-054



嵌入孔
90mm


CI-055

LED lighting


down light series



- CI-053 1,800
- LED-COB-20W 崁燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ140×H70



- CI-054 1,700
- LED-COB-20W 崁燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ110×H270



- CI-055 1,100
- LED-COB-10W 崁燈
- 輸入電壓：AC90-240V
- LED：CREE Inside
- 輸出流明：900lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ110×H62



CI-056




CI-058




CI-057




CI-059




- CI-056 1,400
- LED-18W 吸頂燈
- 輸入電壓：AC90-240V
- LED：OSRAM Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ260×H110



- CI-057 900
- LED-12W 吸頂燈
- 輸入電壓：AC90-240V
- LED：OSRAM Inside
- 輸出流明：1000lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ260×H70



- CI-058 900
- LED-12W 吸頂燈
- 輸入電壓：AC90-240V
- LED：OSRAM Inside
- 輸出流明：1000lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ260×H88



- CI-059 1,400
- LED-18W 吸頂燈
- 輸入電壓：AC90-240V
- LED：OSRAM Inside
- 輸出流明：1600lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ320×H90





■ CI-060



■ CI-061



■ CI-062

LED lighting

ceiling series



- CI-060 900
- LED-12W 吸頂燈
- 輸入電壓：AC110/220V
- LED：OSRAM Inside
- 輸出流明：1000lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ320×H100



- CI-061 900
- LED-12W 吸頂燈
- 輸入電壓：AC110/220V
- LED：OSRAM Inside
- 輸出流明：1000lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ310×H120



- CI-062 900
- LED-12W 吸頂燈
- 輸入電壓：AC110/220V
- LED：OSRAM Inside
- 輸出流明：1000lm
- 工作壽命：30000 小時
- 尺寸 (mm)：Φ310×H110

**SL-711-10W 450**

- 燈泡規格 :LED 球泡燈
- 消耗功率 :10W
- LED: **OSRAM** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :900lm
(取代 75W 鎢絲燈泡)
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :260°
- 工作壽命 :30,000 小時
- 需使用於開放性空間
- 材質 : 鋁鱗片
- 尺寸 (mm): φ 65*120

**SL-711-8W 300**

- 燈泡規格 :LED 球泡燈
- 消耗功率 :8W
- LED: **OSRAM** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :500lm
(取代 75W 鎢絲燈泡)
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :260°
- 工作壽命 :30,000 小時
- 需使用於開放性空間
- 材質 : 鋁鱗片
- 尺寸 (mm): φ 65*120

**SL-710-O 500**

- 燈泡規格 :LED 球泡燈
- 消耗功率 :10W
- LED: **OSRAM** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :900lm
(取代 75W 鎢絲燈泡)
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :260°
- 工作壽命 :30,000 小時
- 需使用於開放性空間
- 材質 : 鋁鱗片
- 尺寸 (mm): φ 65*120

**SL-299 500**

- 燈泡規格 :LED 球泡燈
- 消耗功率 :10W
- LED: **OSRAM** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :900lm
(取代 75W 鎢絲燈泡)
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :260°
- 工作壽命 :30,000 小時
- 需使用於開放性空間
- 材質 : 鋁壓鑄
- 尺寸 (mm): φ 90*125

**CI-063-8W 300**

- 燈泡規格 :LED 球泡燈
- 消耗功率 :8W
- LED: **台光牌 LED** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :500lm
(取代 75W 鎢絲燈泡)
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :260°
- 工作壽命 :30,000 小時
- 需使用於開放性空間
- 材質 : 鋁鱗片
- 尺寸 (mm): φ 65*120

CI-064-10W 360

- 燈泡規格 :LED 球泡燈
- 消耗功率 :10W
- LED: **台光牌 LED** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :900lm
(取代 75W 鎢絲燈泡)
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :260°
- 工作壽命 :30,000 小時
- 需使用於開放性空間
- 材質 : 鋁鱗片
- 尺寸 (mm): φ 65*120

**SL-209-N 240**

- 燈泡規格 :MR-16
- 消耗功率 :6W
- LED: **OSRAM** Inside
- 輸入電壓 :AC/DC 12V
- 輸出流明 :500lm
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :15° 25° 35° 60°
- 工作壽命 :30,000 小時
- 材質 : 鋁 CNC
- 尺寸 (mm): φ 50*50

**SL-209-4C 360**

- 燈泡規格 :MR-16
- 消耗功率 :6W
- LED: **Prolight** Inside
- 輸入電壓 :AC/DC 12V
- 輸出流明 :400lm
- 顏色 :W/WW/R/G/B/A
- 演色性 CRI:84
- 出光角度 :30°
- 工作壽命 :30,000 小時
- 材質 : 鋁 CNC
- 尺寸 (mm): φ 50*50

**新產品****CI-065-7W 300**

- GU10 AC:90-220V
- 消耗功率 :7W
- LED: **OSRAM** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :400lm
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :30° 60°
- 工作壽命 :30,000 小時
- 材質 : 鋁鱗片

**新產品****CI-066-7W 300**

- MR-16 AC:90-220V
- 消耗功率 :7W
- LED: **OSRAM** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :400lm
- 顏色 :W/WW
- 演色性 CRI:84
- 出光角度 :30° 60°
- 工作壽命 :30,000 小時
- 材質 : 鋁鱗片

**SL-813-O 500**

- AR-111 AC:90-220V
- 消耗功率 :8W
- LED: **CREE** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :700lm
- 顏色 :Color:W/WW
- 出光角度 :30° 60°
- 工作壽命 :30,000 小時
- 材質 : 鋁

**SL-813-S 500**

- AR-111 AC:90-220V
- 消耗功率 :8W
- LED: **CREE** Inside
- 輸入電壓 :AC 90-240V
- 輸出流明 :700lm
- 顏色 :W/WW/R/G/B/Y
- 出光角度 :180°
- 工作壽命 :30,000 小時
- 材質 : 鋁



■ SL-708 250

- E27 AC:90-220V
- 消耗功率: 8.0W
- LED: 台光牌 LED Inside
- Color: W/WW。
- 角度: 156°
- 流明: 540lm (min)



■ SL-709 250

- E27 AC:90-220V
- 消耗功率: 8.0W
- LED: 台光牌 LED Inside
- Color: W/WW。
- 角度: 156°
- 流明: 540lm (min)



■ CI-067 1,700

- 規格: Par-38 20W LED 燈泡
- 消耗功率: 20W
- LED: CREE Inside
- 輸入電壓: AC90-240V
- 輸出流明: 1800lm
- 顏色: W/WW
- 演色性: CRI:84
- 出光角度: 30° / 60°
- 工作壽命: 30000 小時
- 材質: 鋁鱗片
- 尺寸 (mm): $\phi 95 \times 105$



■ CI-068 1,700

- 規格: Par-38 20W LED 燈泡
- 消耗功率: 20W
- LED: CREE Inside
- 輸入電壓: AC90-240V
- 輸出流明: 1800lm
- 顏色: W/WW
- 演色性: CRI:84
- 出光角度: 30° / 60°
- 工作壽命: 30000 小時
- 材質: 鋁鱗片
- 尺寸 (mm): $\phi 95 \times 105$



■ SL-866-CREE 1,200

- 規格: Par-30 LED 燈泡
- 消耗功率: 15W
- LED: CREE Inside
- 輸入電壓: AC90-240V
- 輸出流明: 1300lm
- 顏色: W/WW
- 演色性: CRI:84
- 出光角度: 30° / 60°
- 工作壽命: 30000 小時
- 材質: 鋁鱗片
- 尺寸 (mm): $\phi 95 \times 105$



新產品

■ SL-212-3 300

- E14 蠟燭燈 AC:90-220V
- 消耗功率: 5W/LED5W
- LED: OSRAM Inside
- 輸入電壓: AC 90-240V
- 輸出流明: 400lm
- 顏色: W/WW
- 演色性 CRI:84
- 出光角度: 120°
- 工作壽命: 30,000 小時
- 材質: 鋁鱗片



新產品

■ SL-212A 300

- E14 蠟燭燈 AC:90-220V
- 消耗功率: 5W / LED 5W
- LED: OSRAM Inside
- 輸入電壓: AC 90-240V
- 輸出流明: 400lm
- 顏色: W/WW
- 演色性 CRI:84
- 出光角度: 120°
- 工作壽命: 30,000 小時
- 材質: 鋁鱗片



新產品

■ SL-212B 300

- E14 蠟燭燈 AC:90-220V
- 消耗功率: 5W / LED 5W
- LED: OSRAM Inside
- 輸入電壓: AC 90-240V
- 輸出流明: 400lm
- 顏色: W/WW
- 演色性 CRI:84
- 出光角度: 120°
- 工作壽命: 30,000 小時
- 材質: 鋁鱗片



■ CI-069 80

- E14 蠟燭燈 AC:90-220V
- 消耗功率: 2.0W / LED 1.2W
- Color: W/WW/R/G/B/Y。
- 角度: 120°
- 流明: 85lm (min)



■ CI-070 80

- E14 蠟燭燈 AC:90-220V
- 消耗功率: 2.0W / LED 1.2W
- Color: W/WW/R/G/B/Y。
- 角度: 120°
- 流明: 85lm (min)



如 T5 連結燈有 CNS 標準電子式高功率和本產品價格差不多

- SL-761 550
- SL-763 800
- SL-762 900
- 規格:T5 連結燈
- 消耗功率:10W & 15W & 20W
- LED: 台光牌 LED Inside
- 輸入電壓:AC 90-240V
- 輸出流明:1000lm & 1500lm & 2000lm
- 顏色:W/WW
- 演色性 CRI:76
- 出光角度:260
- 工作壽命:30,000 小時
- 材質:鋁
- 尺寸(mm): 573*25*33 & 860*25*33 & 1122*25*33

■ SL-761

■ SL-763


■ SL-762

- CI-071 550
- CI-072 800
- CI-073 900
- 規格:T5 連結燈
- 消耗功率:10W & 15W & 20W
- LED: 台光牌 LED Inside
- 輸入電壓:AC 90-240V
- 輸出流明:1000lm & 1500lm & 2000lm
- 顏色:W/WW
- 演色性 CRI:76
- 出光角度:260
- 工作壽命:30,000 小時
- 材質:鋁
- 尺寸(mm): 573*25*33 & 860*25*33 & 1122*25*33

■ CI-071

■ CI-072

■ CI-073

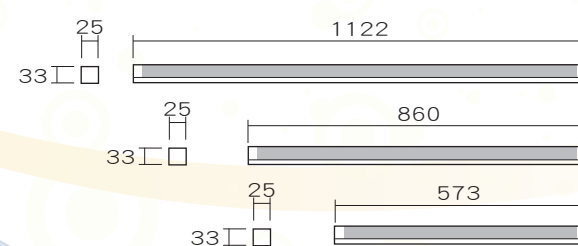

- SL-781 550
- SL-782 900
- 規格:T8 燈管
- 消耗功率:10W & 20W
- LED: 台光牌 LED Inside
- 輸入電壓:AC 90-240V
- 輸出流明:1000lm & 2000lm
- 顏色:W/WW
- 演色性 CRI:76
- 出光角度:260
- 工作壽命:30,000 小時
- 材質:鋁
- 尺寸(mm):580*30 & 1200*30

■ SL-781

■ SL-782

